


2MP Network IR Dome Camera



NEXLEN SOLE DISTRIBUTION
3 YEAR WARRANTY

Full HD
1080

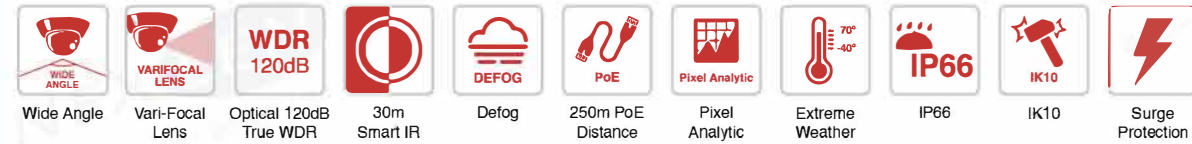

KEY FEATURES

3-axis – It flexibly allows you to adjust the angle that the camera looks at the scene from.

Vari-Focal Lens – Its focal length can be adjusted anywhere between its designated range.

Wide Angle – It allows to cover more area.

Defog – Defog technology applies IR for imaging, and all lose details in fog weather can be reproduced perfectly.



Defog: OFF

Defog: ON

Smart IR illuminators to assist capturing objects in the dark even under 0 lux, up to 98 feet (30 m) away.



Smart IR: OFF

Smart IR: ON


Pixel Analytic Technology Pixel Shutter Speed Control



OFF

ON

250M PoE – Up to 150M (PTZ) / 250m (Dome and Bullet) PoE transmission distance with Cat.5E or higher.

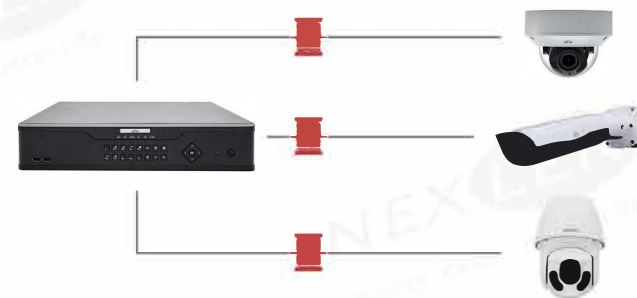

SPECIFICATIONS

	IPC3232ER-DV		IPC3232ER-DV
Camera		Storage	
Sensor	1/2.9", 2 megapixel, progressive scan CMOS	Edge Storage	Micro SD, up to 128 GB
Lens	2.8~12 mm@F1.4; Angle of View (H): 100.0° (wide) ~30° (tele)	Network	
Shutter	Auto/Manual, 1/6~1/8,000 s	Protocols	L2TP,IPv4,IGMP,ICMP,ARP,TCP,UDP,DHCP,PP-PoE,RTP,RTSP,NTP,FTP,HTTP,SIP
Zoom/Focus	Manual	Compatible Integration	ONVIF, API
Min. Illumination	Colour: 0.03 Lux (F1.4, 50IRE) Black & White: 0.01Lux (F1.4, 50IRE)	Interface	
Day/Night	IR-cut filter with auto switch (ICR)	Audio I/O	Audio cable Input: impedance 35 kΩ; amplitude 2 V [p-p] Output: impedance 600 Ω; amplitude 2 V [p-p]
IR Range	Up to 30m (98 ft) IR range	Alarm I/O	1/ 1
S/N	>52 dB	Network	1 RJ45 10M/100M Base-TX Ethernet
WDR	Optical WDR(up to 120dB)	Video Output	1 BNC, impedance 75 Ω; amplitude 1 V [p-p]
Video		Reset	1 Reset Button
Max. Resolution	1920 x 1080	Power Output	DC12V Power Output With PoE
Video Compression	H.264, MJPEG	General	
Frame Rate	1080P (1920x1080): Max. 30 fps, 720P (1280x720): Max. 30 fps, D1 (720x576): Max. 25 fps	Power	12 V DC, or PoE (IEEE802.3 af) Power consumption: Max.6.6 W (PoE :Max.7.2 W)
9:16 Corridor Mode	Supported	Dimensions (Ø x H)	Φ148 x 111.3 mm (Ø5.8" x 4.4")
ROI	Supported	Weight	0.75 kg (1.7 lb)
Video Streaming	Triple Streams	Operating Conditions	
OSD	Up to 8 OSDs	-40°C ~ +60°C (-40°F ~ +140°F), Humidity ≤ 90% RH(non-condensing)	
Privacy Mask	Up to 4 areas	Vandal Resistant	IK10
Audio		Ingress Protection	IP66
Audio Compression	G.711		
Two-way audio	Supported		

BRACKETS

