


**4MP WDR Vandal-resistant  
Network IR Fixed Dome Camera**

**NEXLEN** SOLE DISTRIBUTION  
Better Ideas · Better Life  
**3 YEAR WARRANTY**

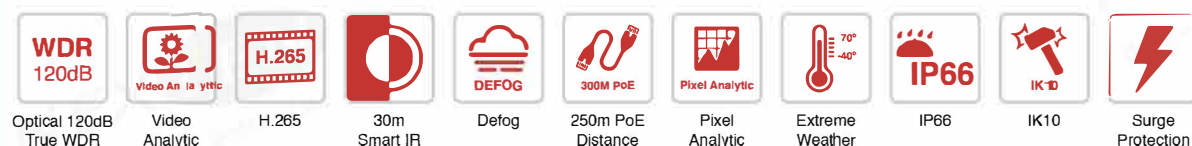

**KEY FEATURES**

**3-axis** – It flexibly allows you to adjust the angle that the camera looks at the scene from.

**Optical 120dB True WDR** – WDR function can ensure clear image with rich details when confronted with sharp lighting contrast, preventing dark or over-exposed image, ensuring great image quality.

**H.265** – Get **50% Reduction** on storage, bandwidth & bitrate with same image quality compared to H.264.

**Video Analytic** – Behavior Detection (Intrusion & Crossing Line), Intelligent Identification (Face Detection) and Statistical Analysis (People Counting).



Intrusion

Crossing Line



Face Detection

People Counting

**Smart IR** illuminators to assist capturing objects in the dark even under **0 lux**, up to 98 feet (30 m) away.



Smart IR: OFF

Smart IR: ON

**Pixel Analytic Technology**  
**Pixel Shutter Speed Control**



OFF

ON

**SPECIFICATIONS**

	IPC324ER3-DVVPF28	IPC324ER3-DVVPF28
Camera		<b>Statistical Analysis</b> People counting
<b>Sensor</b>	1/3", 4 megapixel, progressive scan CMOS	<b>Audio</b>
<b>Shutter</b>	Auto/Manual, 1/6~1/100,000 s	<b>Audio Compression</b> G.711
<b>Lens</b>	2.8 mm@F2.0 Angle of view(H): 101.8°	<b>Two-way audio</b> Supported
<b>Day/Night</b>	IR-cut filter with auto switch (ICR)	<b>Storage</b>
<b>Min. Illumination</b>	Colour: 0.02 Lux (F2.0, AGC ON) 0 Lux with IR on	<b>Edge Storage</b> Micro SD, up to 128 GB
<b>S/N</b>	>55 dB	<b>Network</b>
<b>WDR</b>	120 dB	<b>Protocols</b> L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SIP, 802.1x
<b>Video</b>		<b>Compatible Integration</b> ONVIF, API
<b>Max. Resolution</b>	2592 x 1520	<b>Interface</b>
<b>Video Compression</b>	H.265, H.264, MJPEG	<b>Audio I/O</b> Input: impedance 35 kΩ; amplitude 2 V [p-p] Output: impedance 600 Ω; amplitude 2 V [p-p]
<b>Frame Rate</b>	4MP (2592x1520): Max. 20 fps; 4MP (2560x1440): Max. 25 fps 3MP (2048x1520): Max. 30 fps; 1080P (1920x1080): Max. 30 fps	<b>Alarm I/O</b> 1/1
<b>Video Streaming</b>	Triple	<b>Network</b> 10M/100M Base-TX Ethernet
<b>9:16 Corridor Mode</b>	Supported	<b>General</b>
<b>ROI</b>	Supported	<b>Power</b> 12 V DC, or PoE (IEEE802.3 af) Power consumption: Max 5.5W
<b>OSD</b>	Up to 8 OSDs	<b>Dimensions (Ø x H)</b> Φ108.5 x 81 mm (Ø4.28" x 3.2")
<b>Privacy Mask</b>	Up to 4 areas	<b>Weight</b> 0.45 kg (0.99 lb)
<b>Smart</b>		<b>Working Environment</b> -35°C ~ +60°C (-31°F ~ +140°F), Humidity ≤ 95% RH (non-condensing)
<b>Behavior Detection</b>	Intrusion, crossing line, motion detection	<b>Vandal Resistant</b> IK10
<b>Exception Detection</b>	Audio detection	<b>Ingress Protection</b> IP66
<b>Intelligent Identification</b>	Face detection	

**BRACKETS**

