


KEY FEATURES

- 8-ch IP video input
- 2 SATA up to 12 TB
- 8 RJ45 PoE+ Interfaces
- Third-party IP cameras supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Instant playback, Smart search

250M PoE – Up to 150m (PTZ) / 250m (Dome and Bullet) PoE transmission distance with Cat.5E or higher.

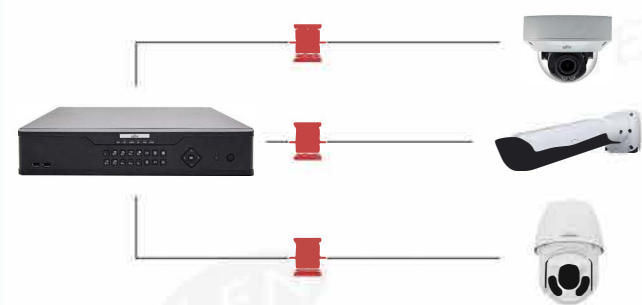

Smart Search – Uniview IP Cameras can support Smart Search Technology by cooperating with Uniview NVRs. It can help people to instant track back the videos easily by just dragging the area that people want to search.

Three Simple Steps:

- Select Area of Interest with Preferable Sensitivity
- Green Bar** - Matched Case with Normal Speed Display
- Blue Bar** - Unmatched Case with 16X Fast Speed Display



SPECIFICATIONS

NVR202-08EP		NVR202-08EP	
Video/Audio Input		Hard Disk	
IP Video Input	8-ch	SATA	2 SATA interfaces
Two-way Audio Input	1-ch, RCA	Capacity	Up to 12TB in total, 6 each HDD
Network		External Interface	
Incoming bandwidth	80Mbps	Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
Outgoing bandwidth	96Mbps	USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0
Remote connection	128	PoE	
Video/Audio Output		Interface	8 independent 100 Mbps PoE network interfaces
HDMI/VGA Output	HDMI/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz	Supported Standard	IEEE 802.3at
Audio Output	1-ch, RCA	General	
Recording Resolution	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	Power Supply	52V DC
Synchronous Playback	8-ch	Consumption (without HDD & PoE)	≤ 8 W
Decoding		Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)
Compression	H.264	Working Humidity	10% ~ 90%
Live view/Playback	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	Dimensions	44 x 360 x 254mm (1.7" x 14.2" x 10.0")
Capability	4 x 4MP@20, 6 x 1080p@25, 16 x 720p@25	Weight (without HDD)	≤ 1.47 Kg (3.24 lb)

